



## TROUGHS AND DRINKERS FOR FREE STALLS



### Compact Trough Drinker 200 cm

Ref. 130.6152

- Compact trough drinker for wall fixation, sufficient for **30 – 40 animals**
- Completely made of **stainless steel**
- Water flow of up to **40 l/min** permits a continual and efficient watering of the animals
- $\frac{3}{4}$ " male connection, possible from right hand side
- With drainage for quick evacuation ( $\varnothing$  100 mm), with a plug security against pulling out by the animals.
- The drain is positioned slightly off-center so that the trough drinker can be mounted central in a partition.
- Contents 120 l

#### ACCESSORIES:

- **Protection bar** (Ref. 131.1398), hot-galvanized
- **Circuit pipe  $\frac{3}{4}$ "** (Ref. 131.6195), stainless steel
- **Heating element 24 V, 180 W** (Ref. 131.6194)

#### RECOMMENDED FOR:

Cattle, dairy cows, calves, ideal for animals with nose rings or anti-suction ring

### Options for Frost Protection

#### Heating element 24 V, for installation under the trough

- **Heating element 24 V, 180 W** (Ref. 131.6194), with heating spiral 24 V, 180 W
- Easy fixation under the trough
- Frost protection **down to  $-20^{\circ}\text{C}$**
- To ensure a frost-free feed pipe, a **frost protection heating cable** 24 V, 20 W, 2 m (Ref. 101.0861), or a 24 V, 30 W, 3 m (Ref. 101.1863) has to be used. This heating cable is connected parallel to the heating spiral of the heating element. Plastic pipes have to be wrapped first with an aluminium adhesive tape.
- For extremely cold areas a **valve heating** (24 V, 7 W, Ref. 131.0527) is recommended for increased frost protection.
- For power supply a SUEVIA **transformer 230/24 V** is necessary. For automatic switch on/off of transformer a thermostat (Ref. 101.0389) can be additionally installed.


#### Connection to a water circuit

- $\frac{3}{4}$ " **circuit pipe in stainless steel** (Ref. 131.6195) suited for installation. If connected to a water circuit and in combination with a SUEVIA heating unit, **frost protection is reached for the water line as well as for the water in the trough.**
- For connection to a water circuit we recommend a SUEVIA **heating unit** (see pages 28 – 31)

Ref.	Type	Packing Hints
130.6152	Compact Trough Drinker 200 cm	1 piece
131.1398	Protection bar, hot-galvanized, for 130.6152	1 piece
131.6195	Circuit pipe $\frac{3}{4}$ ", stainless steel for 130.6152	1 piece
131.6194	Heating element 24 V, 180 W	1 piece
131.0527	Valve Heating Mod. 527, 24 V, 7 W	1 piece/bag
101.0390	Transformer 230/24 V, 200 W	1 piece/box
101.0392	Transformer 230/24 V, 400 W	1 piece/box
101.0389	Thermostat	1 piece/box
101.0861	Frost protection heating cable, 24 V, 20 W, 2 m	1 piece
101.1863	Frost protection heating cable, 24 V, 30 W, 3 m	1 piece
101.1099	Aluminium adhesive tape, 50 mm wide, 50 m	50 m/roll





Example installation in a partition.



**NEW!**



**NEW!**  
**WITH PLUG SECURITY**

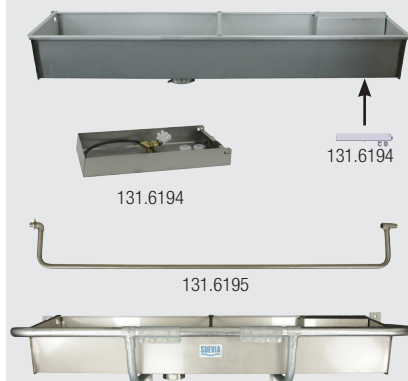



## COW BRUSHES


**NEW!**



### Cow brush **EASYCLEANER DUO**

Ref. 130.5017

- Anatomically formed brush, Bristles made of a very solid and special plastic
- For **up to 100 cows**. In order that every cow has enough time for brushing and wellness, the ideal cow quantity is 60 cows.
- Easy start of actuation by touching the brush
- Maintenance-free and **heavy-duty gear with gear wheels made of hardened steel**.
- Splash-water-protected and dust-proof motor.
- Suitable for animals of different size due to pendulum mounting height range ~28 cm)
- Easy start of actuation by touching the brush
- Change of direction of rotation of bristles each time when the brush is operated, ensuring an even use of bristles. Operating time approx. 2 min.
- **Resistance reverse mechanism:** In case of an overload situation e.g. wound up tail, the EASYCLEANER DUO stops automatically and changes direction of rotation
- Brush ready-for-connection, for indoor and outdoor use (outdoor under a small shelter to prevent dirt particles and hair from sticking to the brushes in wet conditions.)

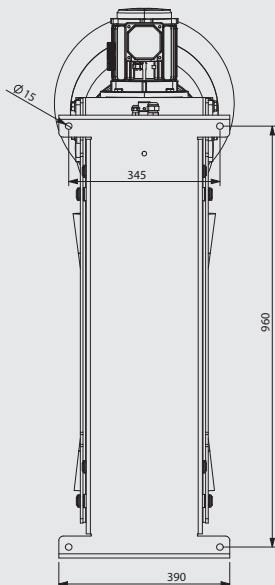

**PG  
2**

Ref.	Type	Packing Hints
<b>NEW!</b> 130.5017	Cow brush EASYCLEANER DUO, 230 V, 50 Hz	2 pieces/pallet 68 pieces/truck

#### Technical data:

<b>Ref.</b>	130.5017
<b>Electric motor</b>	230 V, 50 Hz
<b>Motor capacity</b>	370 W
<b>Protection</b>	IP54
<b>Brush speed</b>	58 U/min
<b>Dimensions</b> (H x W x D)	1190 x 420 x 1070 mm
<b>Weight</b>	~144 kg



## NEW PRODUCTS

**NEW!**



### Drinker for Free Stalls and Pasture

#### Model WT55

Ref. 160.0550

#### Model WT55-N (low pressure up to 1 bar)

Ref. 160.0551


- **Drinker with float valve** made of top quality **UV-resistant polyethylene** with two drinking places, volume 55 l (15 gallons) at maximum level height.
- 4 holes for wall fixation
- **WT55** installed with a **high-performance float valve**, ½" female connection (inclusive elbow union) possible connection from top or bottom.
- High water flow **up to 35 l/min (9 gallons/min)**
- Easy access to float valve thanks to big service aperture
- No water spillage thanks to internally rolled rim
- With **big exits Ø 50 mm on both sides** for easy and quick drainage.
- **WT55-N** with low pressure valve up to 1 bar, connection ¾" male (Ref. 160.0551)

#### ACCESSORIES:

- **Protection bar** (Ref. 131.1397), galvanized

#### RECOMMENDED FOR:

Cattle, dairy cows, calves, horses, sheep

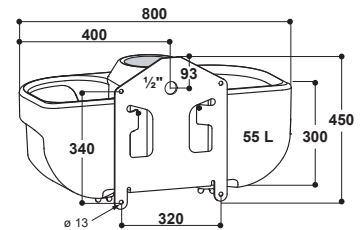

131.1397

**BIG EXITS!**



	Ref.	Type	Packing Hints
<b>NEW!</b>	160.0550	Drinker for free stalls and pasture Mod. WT55	1/3S/15P
<b>NEW!</b>	160.0551	Drinker for free stalls and pasture Mod. WT55-N	1/3S/15P
<b>NEW!</b>	131.1397	Protection bar, galvanized	1 piece

**NEW!**



### Double Water Tank Drinker


#### Model FT55

Ref. 160.0552

- For direct water tank trailer installation with fixation flange
- With two drinking places, contents 55 l (15 gallons) at maximum level height.
- Made of **UV-resistant first-class polyethylene**
- **Installed high-performance low pressure float valve** for quick water flow
- For flange installation, inclusive sealing
- Valve can be blocked for transportation, so that the water stays in the tank.
- With **big exits Ø 50 mm on both sides** for easy and quick drainage.

#### RECOMMENDED FOR:

Cattle, dairy cows, horses, sheep



	Ref.	Type	Packing Hints
<b>NEW!</b>	160.0552	Double water tank drinker Mod. FT55	1 piece

### Adapter plate for drinking bowls

Ref. 131.6094

- Adapter plate, galvanized, for fixation of SUEVIA drinking bowls on a barrier
- For barriers with 4 or 5 horizontal pipes.
- Depending on the distance between the pipes, the adapter plate can be used simply with U-bolts or with a second counter plate and M12 bolts. Many options are shown online as a PDF download.
- Suitable for: Mod. 12P, 25R, 60, IDEAL (61), 115, MINICUP (127), 130P, 340, 375.

	Ref.	Type	Packing Hints
<b>NEW!</b>	131.6094	Adapter plate for drinking bowls	1 piece
	131.0169	Fixing bracket M12 1½" – 2", galvanized	1 piece/bag